

PROTECT YOUR INVESTMENT

Formulated with an advanced hybrid wax emulsion, ExoWax forms a tough, flexible exoskeleton that strictly regulates moisture loss, effectively preventing checking and drying splits in green logs, heavy timbers, and exposed lumber. Whether you're stabilizing fresh cuts in the field or safeguarding premium inventory in the yard, this high-performance sealer locks in structural integrity and preserves the visual quality of your wood.

NATURAL PROTECTION, SUPERIOR RESULTS

ExoWax is formulated with natural plant-based polymers and wax to create a breathable barrier that controls moisture loss without trapping harmful vapors. Unlike petroleum-based sealers, ExoWax is non-toxic, freeze stable, and safe to use on all hardwoods and softwoods. The clear formula dries invisible, preserving the natural appearance of your wood while providing maximum protection against the #1 cause of wood degrade: end checking.

APPLICATION INSTRUCTIONS


SURFACE PREPARATION: All areas to be coated should be clear of dirt or debris.

APPLICATION: Apply ExoWax using a brush, roller, or sprayer until it begins to drip slightly. For optimal coverage, use a gas engine, electric, or air operated backpack sprayer. If using spray equipment, we recommend a 0.21" / 0.55mm tip or larger.

LARGE TIMBERS: When coating logs or timbers larger than 24" / 60cm in diameter, we recommend two coats applied within a 15 minute period.



Made in USA

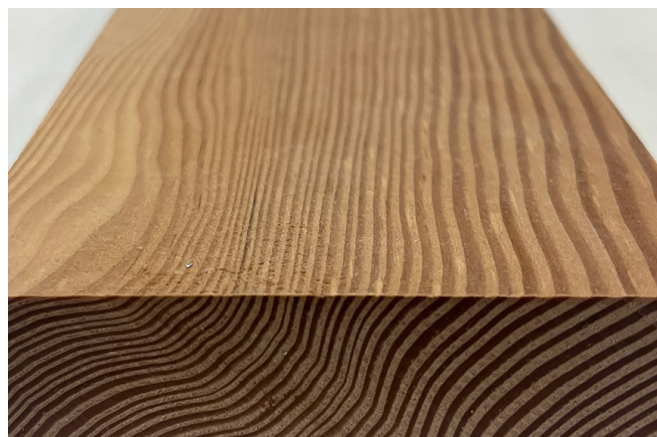

TECHNICAL SPECIFICATIONS

Formula: Advanced hybrid wax emulsion with natural plant-based polymers

Color: Clear (dries invisible)

Coverage: 25 sq ft per quart

Application: Brush, roller, or sprayer (0.21" / 0.55mm tip or larger)

Dry Time: Touch dry in 1-2 hours depending on conditions

Cleanup: Hot soapy water

Storage: Store above 50°F / 10°C to prevent freezing

VOC: Low VOC, non-toxic formula

Made in USA

